



ACOS
GRAF
FÁBRICA DE MÁQUINAS GRÁFICAS, LDA.

www.acosgraf.com



AIRDRYER 4M + ASP + OPEN



The AIRDRYER 4M + ASP + OPEN is a drying tunnel equipped suitable to dry plastisol inks; water base or solvent inks. The AIRDRYER 4M+ ASP + OPEN is equipped with hot air turbine that will work in close loop air circuit so you have maximum energy saving with optimal drying results in all types of inks. The AIRDRYER 4M + ASP + OPEN can open the heat section at 45 degrees for easy access to the interior for cleaning; technical service or removal of a product inside the heat chamber. As an standard the AIRDRYER 4M + ASP + OPEN is equipped with a smoke extraction system that includes a chimney at the entrance and exit and also a suction motor for smoke extraction.

Note: As características podem ser alteradas sem aviso prévio



ACOS
GRAF
FÁBRICA DE MÁQUINAS GRÁFICAS, LDA.


Rua do Castalhão - Canelas (Zona Industrial da Mina), nº320 4410 - 269 Canelas
VNG - Portugal P.O.Box - 45 -4408 VALADARES CODEX - Portugal
Tel. +351 227 621 679 / +351 227 621 901 - Fax +351 227 623 375
www.acosgraf.com | geral@acosgraf.com



Turbina de re circulação de ar quente de alto rendimento dando a possibilidade de secar tintas base de água e outras




Opção de painel electrónico com opção de economia de energia

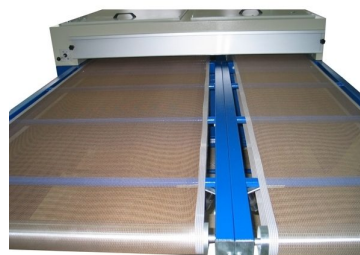

Possibilidade de equipar tunel com 2 tapetes individuais



Pontes de ar frio para arrefecer peça disponíveis



PRODUCT DESCRIPTION

- Mesh belt coated with TEFLON;
- Electronic speed adjuster from belt speed;
- Re circulation from air in closed loop circuit for option water base drying, PLASTISOL and others;
- Hot air velocity with the possibility from adjustment;
- Heating emitters in chromium nickel;
- Digital temperature controller with PID method;
- Thermal isolation made by 10 mm thickness material from hot chamber;
- Chimney to make smoke exhaustion;
- Maximum height from object that you can dry is 13 cm as standard;
- Maximum working temperature as standard - 180 °c;
- Can open the heat section at 45 degrees for easy access to the interior for cleaning; technical service or removal of a product inside the heat chamber
- Equipped with a smoke extraction system that includes a chimney at the entrance and exit + a suction motor for smoke extraction
- Other dimensions can be manufacture by request.

AIRDRYER 4M + ASP + OPEN Units		AI ASP OPEN 40007	AI ASP OPEN 40008	AI ASP OPEN 40010	AI ASP OPEN 40012	AI ASP OPEN 40015	AI ASP OPEN 40016
Heating dimension	Cm	400x70	400x80	400x100	400x120	400x150	400x160
Curing time range	s	60 - 180	60 - 180	60 - 180	60 - 180	60 - 180	60 - 180
Width of belt	Cm	70	80	100	120	150	160
Maximum height of objects to dry	Cm	13	13	13	13	13	13
Power install	kW	22,4	25,6	32	38,4	48	51,2
Maximum working temperature	C	200	200	200	200	200	200
External length	Cm	515	515	515	515	515	515
External width	Cm	115	125	145	165	185	195
External height	Cm	130	130	130	130	130	130
Weight	Kg	450	490	540	600	650	670
Voltage	V	380	380	380	380	380	3x 400

Note: As características podem ser alteradas sem aviso prévio