



ACOSGRAF

FÁBRICA DE MÁQUINAS GRÁFICAS, LDA.

www.acosgraf.com



CERAMIC DRYER 3M



www.acosgraf.com

The CERAMIC DRYER is a drying tunnel equipped with ceramic emitters suitable to dry PLASTISOL inks printed direct in to garment or in paper (heat transfer method). The CERAMIC DRYER is equipped with the possibility to lower or raise the heating elements.

Note: As características podem ser alteradas sem aviso prévio



ACOSGRAF

FÁBRICA DE MÁQUINAS GRÁFICAS, LDA.

www.acosgraf.com




Option to have electronic control board




Possibility to adjust the height from heating elements



Perfect heating distribution in belt width direction to have perfect drying results



Possibility to have saving energy program that gives a 20 to 30% less energy consumption

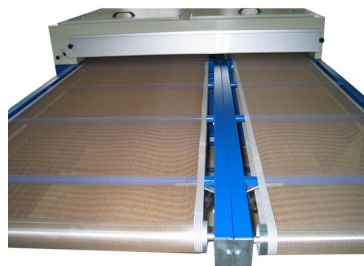

Possibility to equipped dryer with 2 belt system



Dryers with re circulation from air to dry water base inks available

PRODUCT DESCRIPTION

- Belt in mesh coated with Teflon;
- Electronic adjuster from belt speed;
- Equipped with ceramic heating elements;
- Possibility to adjust the height from the ceramic elements for better energy efficiency;
- Digital temperature controller with PID method;
- Thermal isolation in all surface for hot chamber;
- Working temperature range from: ambient temperature to 180°C;
- Maximum height from objects to dry is 13cm as standard;
- Other dimensions can be manufacture.

CERAMIC DRYER 3M	Units	CD 30050	CD 30075	CD 30010	CD 30012
Heating dimension	Cm	300x50	300x75	300x100	300x125
Curing time range	s	25 to 120	25 to 120	25 to 120	25 to 120
Width of belt	Cm	50	75	100	125
Maximum height of objects to dry	Cm	13	13	13	13
Power install	kW	10	15	20	25
External length	Cm	450	450	450	450
External width	Cm	86	102	117	157
External height	Cm	150	150	150	150
Weight	Kg	660	720	760	800
Voltage	V	3x 400	3x 400	3x 400	3x 400

Note: As características podem ser alteradas sem aviso prévio

www.acosgraf.com