



ACOS
GRAF

FÁBRICA DE MÁQUINAS GRÁFICAS, LDA.

www.acosgraf.com



LUXDRYER HALOGEN



The LUXDRYER HALOGEN is a machine suitable to expose screen printing screens. The machine is equipped with special design halogen light source lamp for a faster screen exposure and maximum detail. The LUXDRYER HALOGEN is a fully automatic machine with a pressure meter for the vacuum installed as a standard to prevent (accidental opening from screens. It can also be equipped with instant halogen light source lamps

Note: As características podem ser alteradas sem aviso prévio



ACOS GRAF

FÁBRICA DE MÁQUINAS GRÁFICAS, LDA.


www.acosgraf.com



Halogen light source for fast and perfect screen exposure




Drying cabinet with forced ventilation and working temperature from 15 to 50 degrees

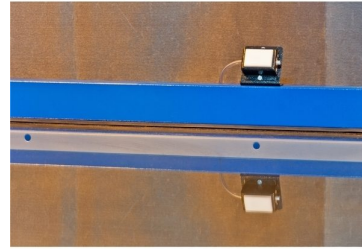

Fully automatic operation for vacuum and exposure with perfect and quiet vacuum



LCD control panel equipped with photocell from light intensity measure to make automatic compensation from



PRODUCT DESCRIPTION

- Halogen light source for fast and perfect screen exposing;
- Equipped with exposure unit with instant halogen light source (no need to pre heat or be in standby mode);
- LCD control panel;
- Capable to save until 10 different exposure times;
- Fully automatic operation method from vacuum and exposing operation;
- Equipped as standard with photocell from light intensity measure to make automatic compensation from exposure times;
- Drawers running smoothly in ball-bearing slides with end stop;
- Drying cabinet with forced ventilation;
- Digital temperature control from drying cabinet;
- Working temperature of drying cabinet - 15 to 50 degrees;
- Yellow light to prepare the job;
- Perfect and quiet vacuum;
- Emulsion hardener program available as standard.

LUXDRYER HALOGEN	Units	LUX HAL 0608	LUX HAL 0811	LUX HAL 1010	LUX HAL 1012	LUX HAL 1313	LUX HAL 1215	LUX HAL 1416
Maximum screen size	Cm	60x80	80x110	100 x100	100x125	130x135	120x150	140x160
Halogen lamp power	W	3000 RAPID	3000 RAPID	5000 RAPID	5000 RAPID	5000 RAPID	5000 RAPID	5000 RAPID
External depth	Cm	150	105	135	147	165	175	202
External width	Cm	135	130	155	172	190	210	230
External height	Cm	250	260	250	250	280	280	300
Power install	Kw	8	8	10	10	12	12	12
Weight	Kg		680			780	830	900
Voltage	V	3x400	3x400	3x400	3x400	3x400	3x400	3x400
Shipping dimensions (W*D*H)	Cm				150*130*120	195*205*190		

Note: As características podem ser alteradas sem aviso prévio